


## **ZU725T**

Ultra bright professional installation laser projector







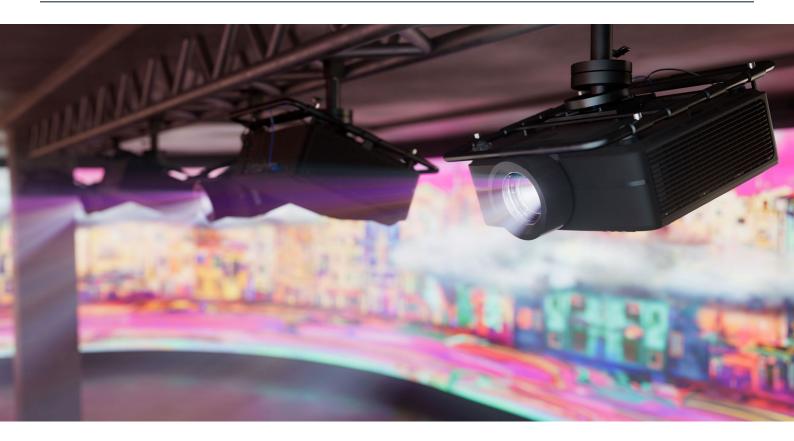

- 7800 lumen DuraCore laser projector Ultra bright for immersive installations
- Full motorized lens shift Ideal for a simple set-up
- Large zoom range Motorized zoom expands placement opportunities
- Long life Delivers 30,000 hours of virtually maintenance-free operation



At 7800 lumens with 4K and HDR compatibility, the ZU725T features a dust-resistant IP5X certified optical engine for 24/7 operation

capabilities, offering true maintenance-free projection for up to 30,000 hours of powerful performance in Eco mode. Other features include motorized zoom and focus, full motorized lens shift and built-in dual 10W speakers.

High brightness, color precision and quiet operation, alongside a 1.6x zoom make this projector the ideal solution for a variety of end-user scenarios and professional environments, such as simulation, edge-blending and projection mapping, and immersive installations.

## **Specifications**

Watts per speaker
Networking
LAN - wireless networking

LAN

Power

Power supply

Gross weight

Net weight

Power consumption (standby)

Power consumption (min)

Power consumption (max)

Weight and dimensions

Dimensions (W x D x H) mm

UPC: 796435 44 656 7, EAN: 50553	387666955, Colour: Black
Display/image	
Display technology	DLP
Resolution	WUXGA (1920x1200)
Brightness	7.800 lumens
ANSI brightness	6.500
Contrast ratio	3.000.000:1
Contrast ratio - full on/off	1.100:1
Native aspect ratio	16:10
Aspect ratio - compatible	4:3,16:9,16:10
Keystone correction -	30°
horizontal	
Keystone correction - vertical	30°
Uniformity	95%
Screen size	1.27m ~ 7.62m (50" ~ 300") diagonal
Lamp info	
Light source type	DuraCore Laser
LASER life	30.000 hours
Optical	
Throw ratio	1.25:1 ~ 2:1
Projection distance (m)	1.33m - 13.06m
Zoom	1.6
Zoom type	Motorised
Focal length (mm)	18.72~29.59
Lens shift	Vertical: +/-55%, Horizontal: +/-25%
Lens shift	Yes - {{downloads_link}}
Connectivity	
Connections	Inputs 1 x HDBaseT, 1 x HDMI 2.0, 1 x HDMI 1.4a 3D
	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm
	Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A,
	1 x Audio 3.5mm
	Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x
	RS232
LAN - wireless networking	No
General	
Noise level (typical)	34dB
Noise level (max)	36dB
3D	Full 3D
Security	Security bar, Kensington Lock
OSD / display languages	9 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional)
24/7 operation	Yes
360° operation	Yes
Remote control	Backlit ProAV remote
Speaker count	2
144.11	4004

10W

No

Yes

0.5W

260W

520W

17.5 kg

14 kg

486 x 432.5 x 176

AC 90 - 264V 50/60 Hz with PFC input





